

155°-šarke



Web kod – unesite ili kliknite u konfiguratoru proizvoda



DQDHEM

Planiranje

Dimenzije šarki i izračunavanje fuga kod fabričke podešenosti (montažna ploča distanc = 0 tj. 9 mm)



Prostor koji zahvataju vrata kod ugla otvaranja od 90°

Ugaoni graničnik  
0-Uskakanje

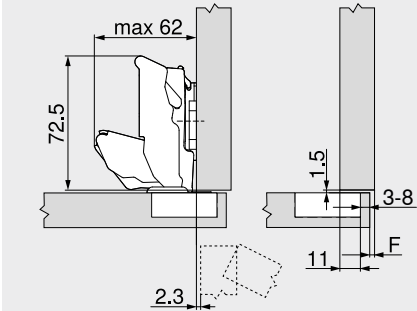



F Fuga

Središnji okov

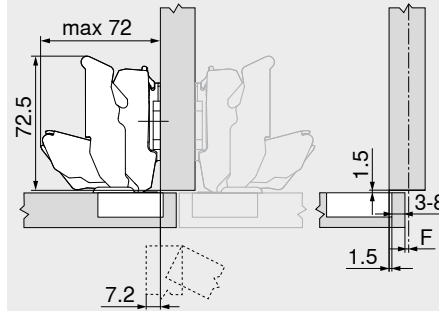

Unutrašnji okov

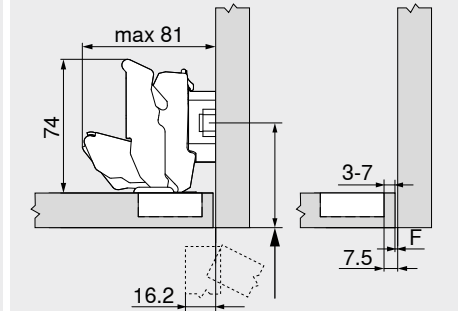

A Položaj pričvršćivanja montažne ploče pomoći unazad za debljinu fronta  $FD + 1.5$  mm

Rastojanje lonca TB

Frontalni okov FA (mm)

MD	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	
0											3	4	5	6	7	8
3							3	4	5	6	7	8				
6				3	4	5	6	7	8							
9	3	4	5	6	7	8										

MD Montažna ploča distanc (mm)

Frontalni okov FA (mm)

MD	-4.5	-3.5	-2.5	-1.5	-0.5	0.5	1.5	2.5	3.5	4.5	5.5	6.5	7.5	8.5	9.5			
0													3	4	5	6	7	8
3													3	4	5	6	7	8
6													3	4	5	6	7	8
9													3	4	5	6	7	8

MD Montažna ploča distanc (mm)

Frontalni okov FA (mm)

MD	-4.5	-3.5	-2.5	-1.5	-0.5													
0																		
3																		
6																		
9																		

MD Montažna ploča distanc (mm)


Minimalni prerez fuga F za frontove sa poluprečnikom fronta (R = 1 mm) kod fabričkog podešavanja

Rastojanje lonca TB (mm)	Debljina fronta FD (mm)												
	20	21	22	23	24	25	26	27	28	29	30	31	
3	0	0	0	0	0	0	0.5	0.5	1.0	2.0	2.0	3.0	4.5
4	0	0	0	0	0	0	0.5	1.0	2.0	2.0	2.5	4.0	
5	0	0	0	0	0	0	0.5	1.0	2.0	2.0	3.5		
6	0	0	0	0	0	0	1.0	1.5	2.0	3.0			
7	0	0	0	0	0	0	1.0	1.5	2.5				
8	0	0	0	0	0	0	1.0	1.5					


Kod ugaonog pričvršćivanja na zid preporučuje se da se prvo jednom isproba pričvršćivanje

110° Graničnik ugla otvaranja  
92° Graničnik ugla otvaranja


Podešavanje

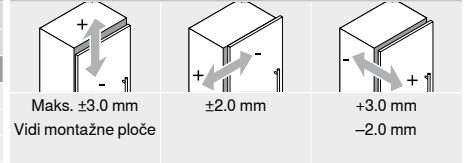


Montaža zavrtnja

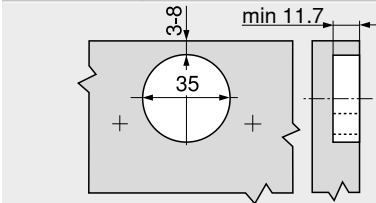

Montaža INSERTA | utiskivanje

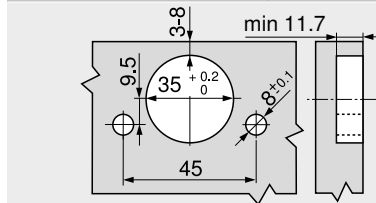

Dimenzije lonca

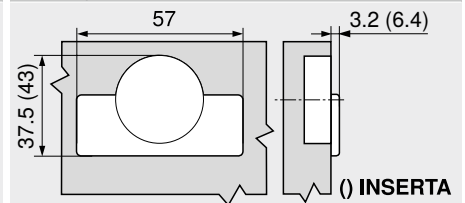

Napomene o stranama

Pregled	73
Montažne ploče	150
Pribor – držač šarki, poklopac	157
Pribor	159
TIP-ON za vrata	190
Blum usluge	602
Ostale tehničke informacije	708

Montaža, demontaža i podešavanje

Short-URL  
[www.blum.com/a210](http://www.blum.com/a210)

